

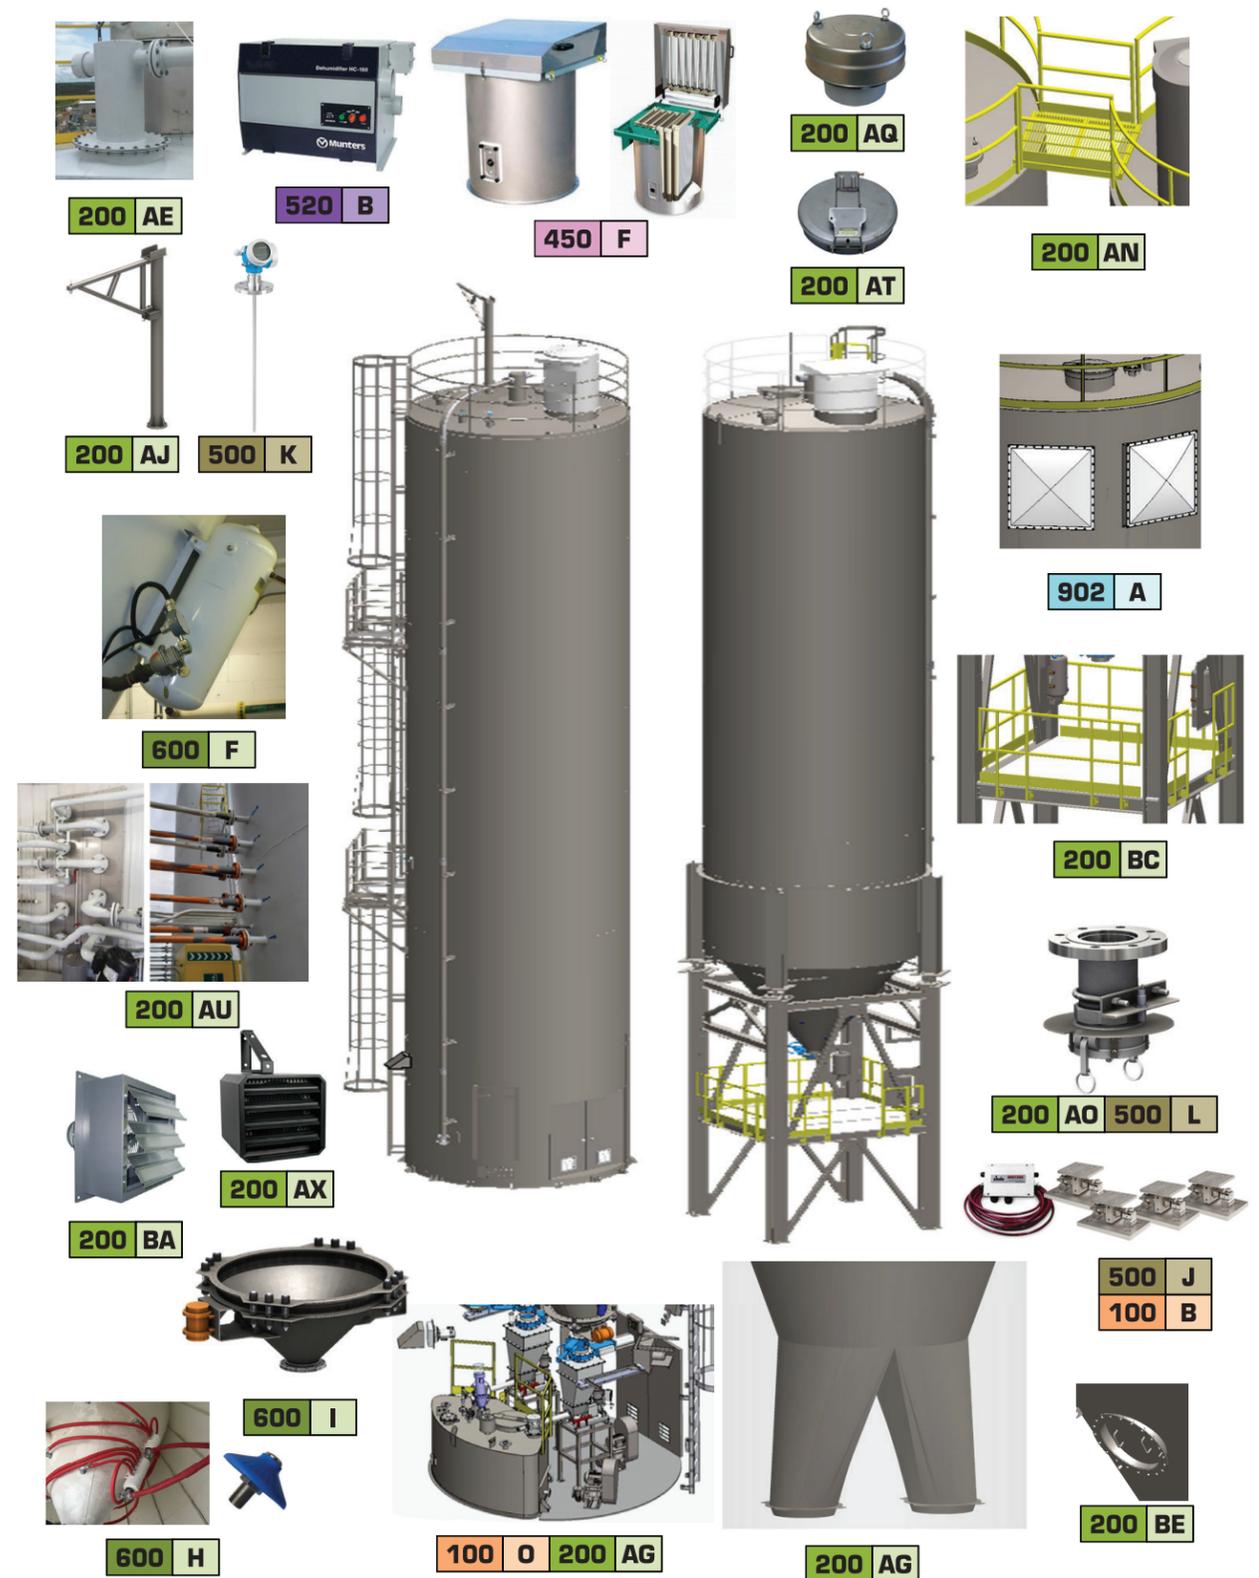
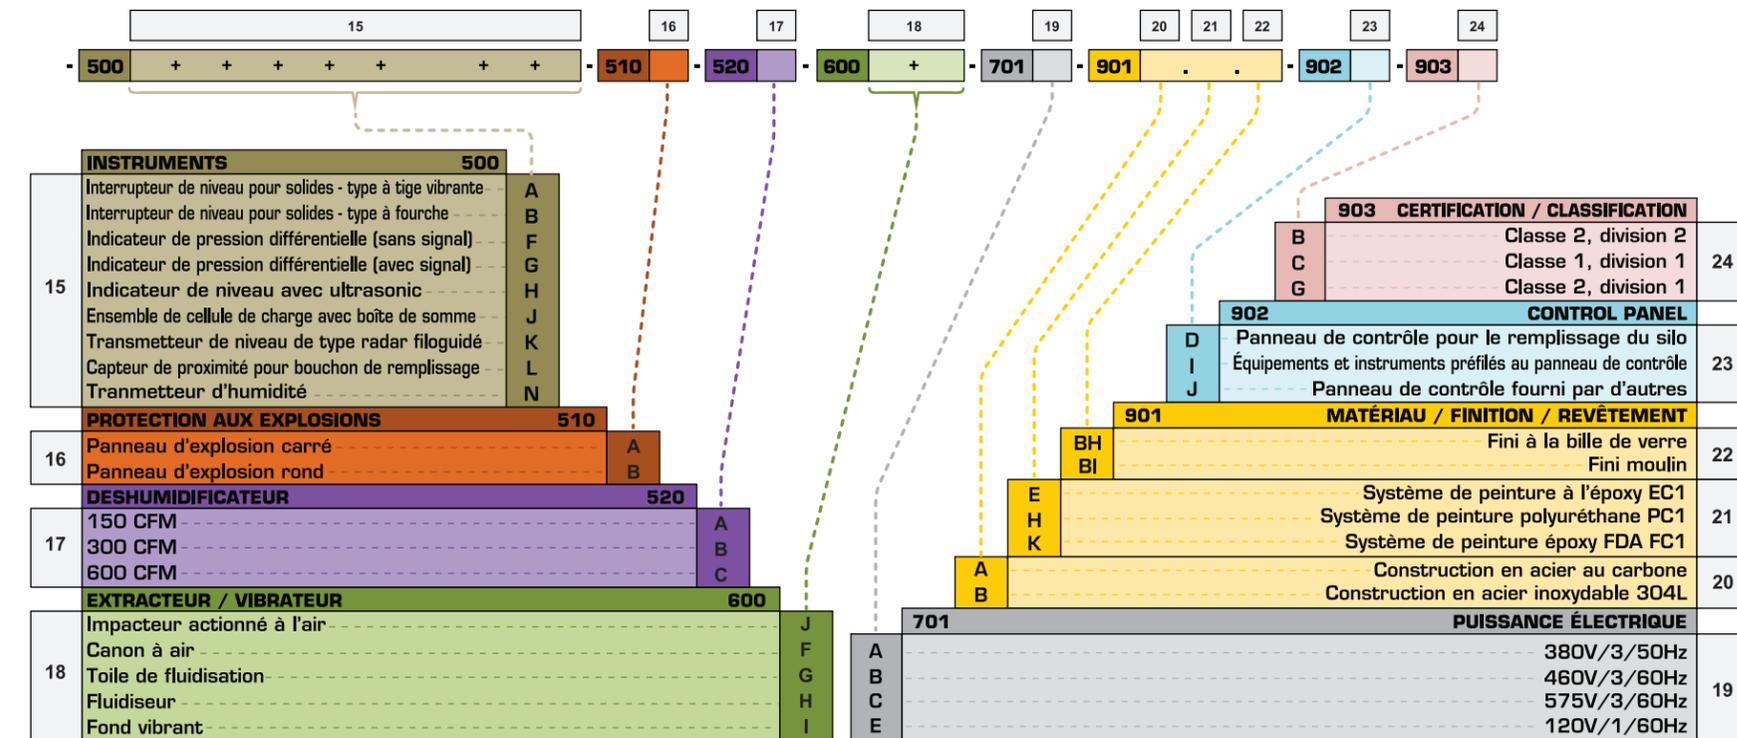
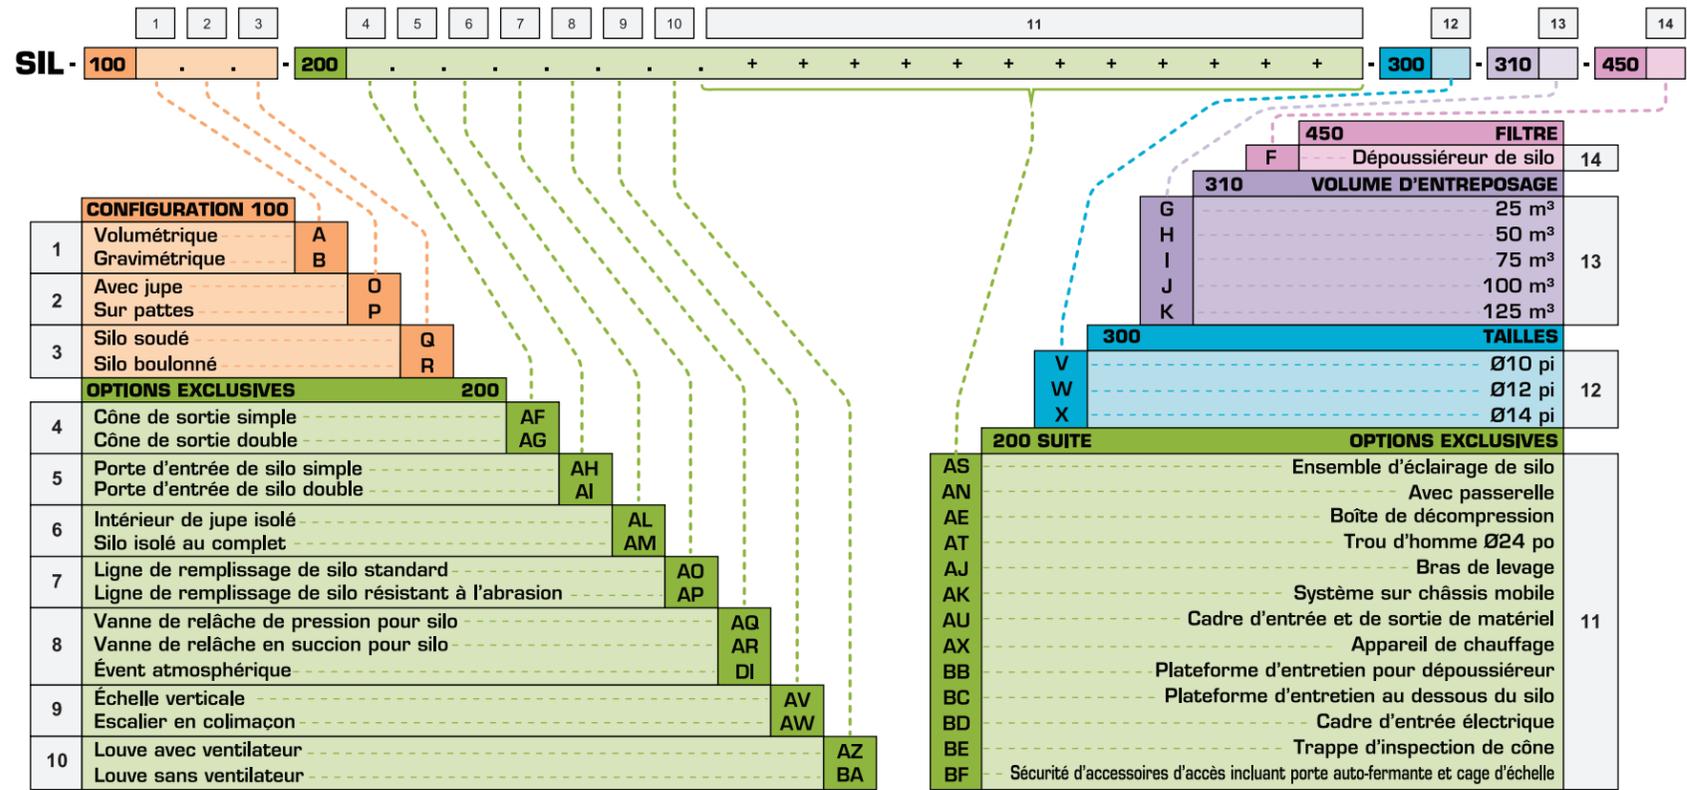


SIL - CONFIGURATEUR SILO D'ENTREPOSAGE

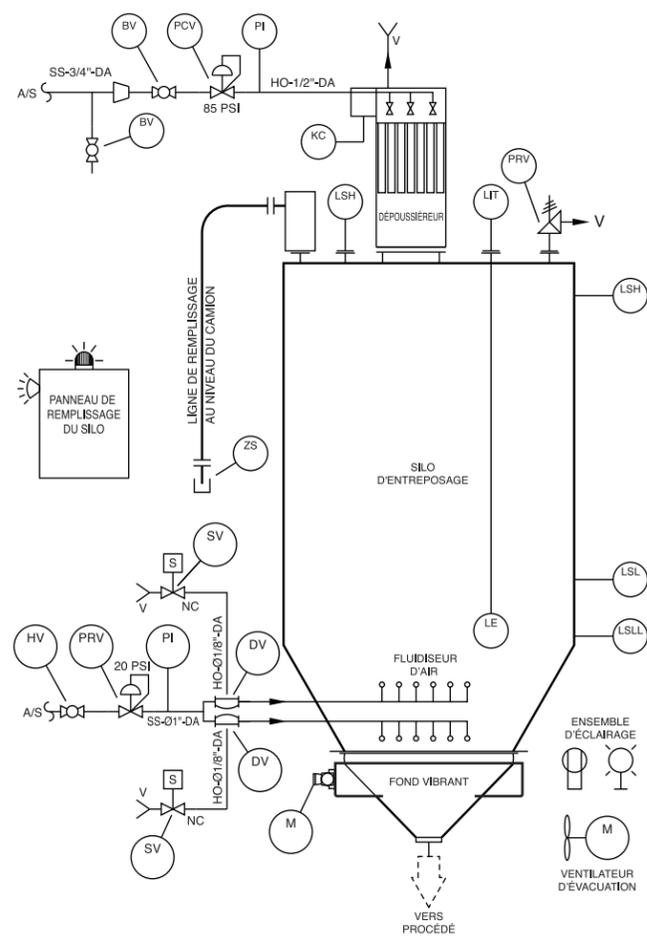

SIL - CONFIGURATEUR SILO D'ENTREPOSAGE

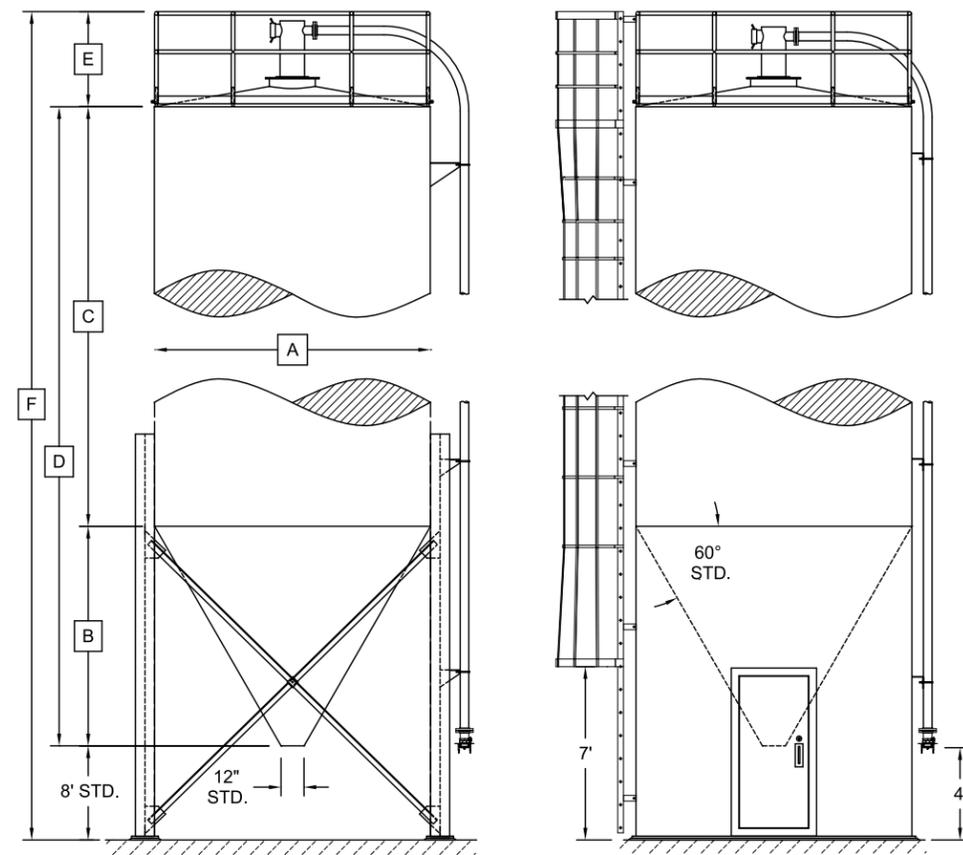

Modèle	Diamètre (A)	Hauteur			Poids (Vide)	
		Section droite (B)	Cône 60° (C)	Réservoir total (D)	lbs	kg
CVAS-S25	8	17,01	6,06	23,08	5304	2411
CVAS-S50	10	21,84	7,79	29,64	8451	3841
CVAS-S75	12	22,30	9,53	31,82	10927	4967
CVAS-S100	12	30,88	9,53	40,41	13667	6212
CVAS-S125	12	39,47	9,53	48,99	20604	9366

Modèle	Volume		Capacité - chaux hydratée 400 kg/m³ - 25 lbs/pi³		Capacity - carbonate de sodium (dense) 960 kg/m³ - 60 lbs/pi³		Capacité - charbon actif 480 kg/m³ - 30 lbs/pi³	
	m³	ft³	kg	lbs	kg	lbs	kg	lbs
CVAS-S25	25	883	10000	22069	24015	52965	12008	26483
CVAS-S50	50	1766	20000	44138	48030	105930	24015	52965
CVAS-S75	75	2648	30000	66206	72045	158895	36023	79448
CVAS-S100	100	3531	40000	88275	96060	211860	48030	105930
CVAS-S125	125	4414	50000	110344	120075	264825	60038	132413